




Island Curved Glass

Deli Curved Glass

NOTE:- Serving height for children up to 12 years of age. This model is available with a work top height of 800mm and a Trayslide height of 773mm. Please add "B" to the end of the product code.



Moffat Polar Plates keep food chilled for 2 to 3 hours. Before use, the Polar Plates are charged for 8 to 12 hours in a deep freeze.

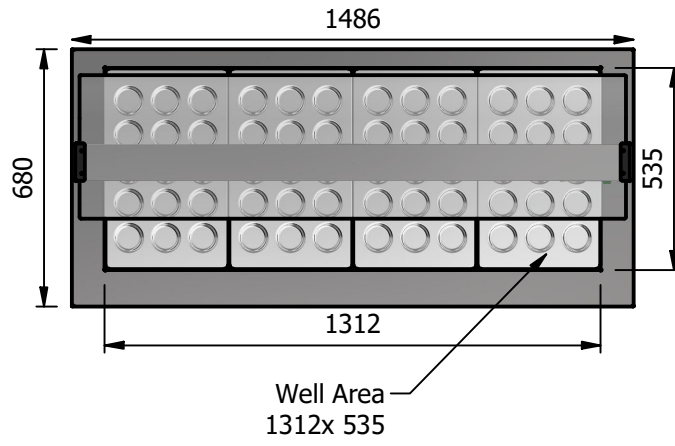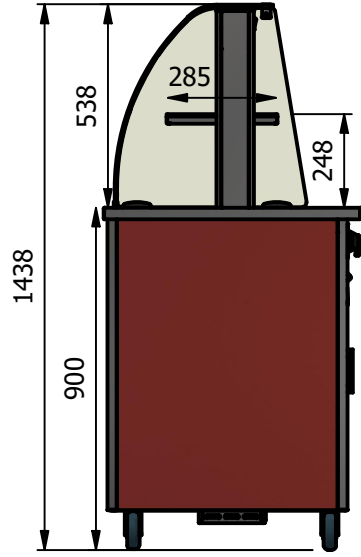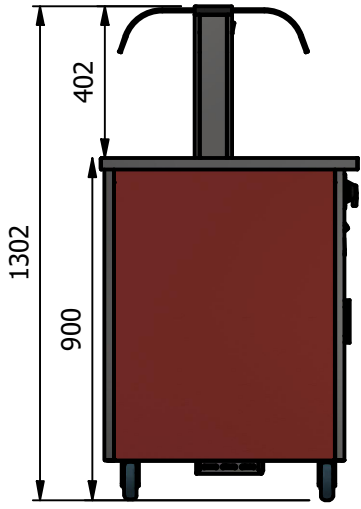

Moffat Specification

Polar Well
The Stainless steel top inset with a Insulated well with contact cooling Polar plates

Dimensions
Width - 1486mm
Depth - 680mm
Height - 900mm
Weight - 117kg

Area of Well
1312mm x 535mm




Capacity of Cupboard [usable inside space]
Width - 1312mm
Depth - 555mm
Usable Height Bottom shelf - 204mm
Usable Height Top Shelf - 245mm

190 off 10" plates stacked
or
8 off 1/1GN pans side by side 150mm deep 4 on top 4 on bottom

Power Rating with Gantry
0.032kw
complete with a 2m long cord set & 13amp plug

Materials
1.2mm 304 Grade St/ Steel Top & Supports
0.7mm 430 Grade St/ Steel Internal Structure
GN 1/1 Grid Shelves with 30mm x 30mm tube supports

Installation
All swivel castors, two braked

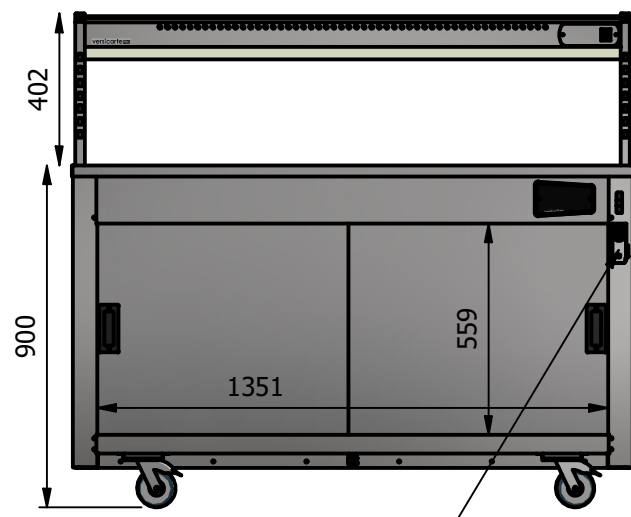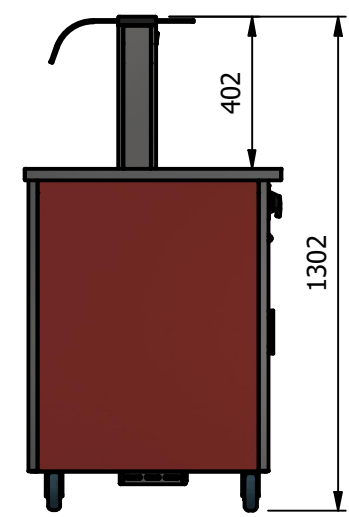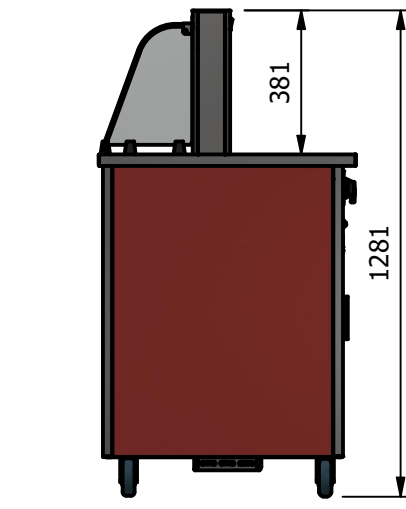

POWER CABLE ENTRY POINT

Curved Glass Closed Front

Curved Glass Open Front

ALL SHEET METAL DIMENSIONS ARE I/S (INSIDE SIZES) (UNLESS OTHERWISE STATED)

ALL DIMENSIONS IN (mm), TOLERANCE = LINEAR ± 0.5mm, ANGULAR ± 0.5mm (OR AS STATED). ALL SHARP EDGES TO BE REMOVED FROM SHEET METAL PARTS

Product	VERSICARTE			Product No	N/A		
Description	*** VC4PW *** Curved Glass Options						
Material/Finish	Thickness		Desp/Date				
Legacy P/N	Weight	117kg	Quote No.		Dwg No.	VCP-060421	Issue
Client			SO Number	STANDARD	Drawn By	ABB	-
Client Project			Approved By		Date	04/07/2023	

No reproduction or publication of this drawing may be made, and no article may be manufactured or assembled in accordance with this drawing without prior written consent. This prohibition is a term of any contract relating to this drawing. Rights reserved under the Copyright Act 1956 as amended by the Design Copyright Act 1968.

