

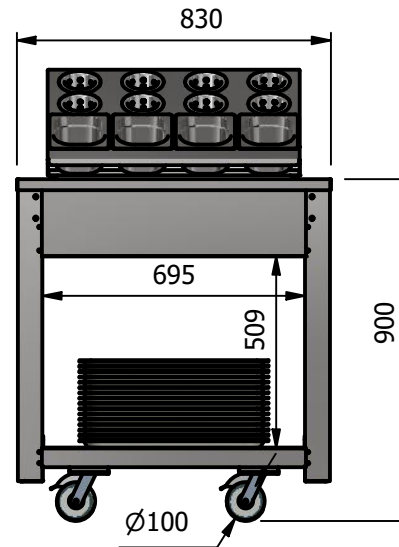


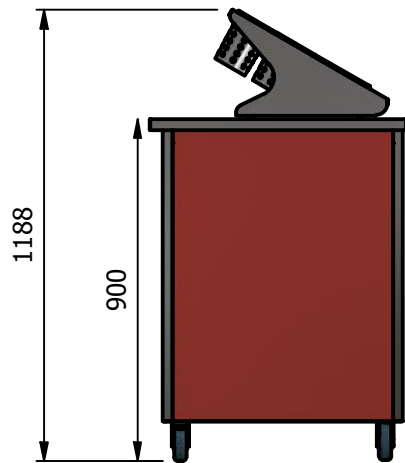

NOTE:- Serving height for children up to 12 years of age.
 This model is available with a work top height of 800mm
 Trayslide height of 773mm.
 Please add "B" to the end of the product code.

Cutlery and condiment station

Tray pickup area

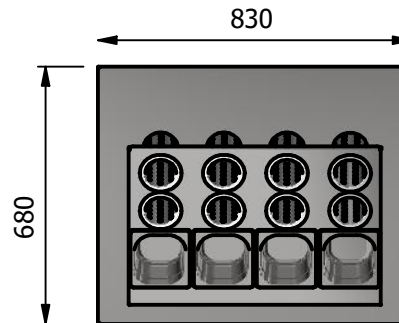

Moffat Specification

Solid Stainless Steel Worktop provides a clean serving area.

Dimensions

Width - 830mm
 Depth - 680mm
 Height - 900mm
 Weight - 30kg

Cutlery condiment station

Eight Perforated Cups
 Four GN1/6 Type Containers
 Rubber Feet

Usable tray area

Width 695mm x Depth 630mm x Height 509mm

Materials

1.2mm 304 Grade St/ Steel Top & Supports
 0.7mm 430 Grade St/ Steel Internal Structure
 GN 1/1 Grid Shelves with 30mm x 30mm tube supports

Installation

All swivel castors, two braked

ALL SHEET METAL DIMENSIONS ARE I/S (INSIDE SIZES) (UNLESS OTHERWISE STATED)

ALL DIMENSIONS IN (mm), TOLERANCE = LINEAR ± 0.5mm, ANGULAR ± 0.5mm (OR AS STATED). ALL SHARP EDGES TO BE REMOVED FROM SHEET METAL PARTS

Product	VERSICARTE			Product No	N/A			 The Catering Equipment Company			
Description	*** VCCT ***										
Material/Finish	Thickness		Desp/Date				<small>No reproduction or publication of this drawing may be made, and no article may be manufactured or assembled in accordance with this drawing without prior written consent. This prohibition is a term of any contract relating to this drawing. Rights reserved under the Copyright Act 1956 as amended by the Design Copyright Act 1968.</small>				
Legacy P/N	Weight	30kg	Quote No.								
Client				SO Number	STANDARD		Dwg No.	VCP-065497	Issue		
Client Project				Approved By			Drawn By	ABB	-		
							Date	28/10/2019			
E & R MOFFAT LTD, SEABEGS ROAD, BONNYBRIDGE, FK4 2BS, T: +44 (0)1324 812272, E: sales@ermoffat.co.uk, Web: www.ermoffat.co.uk							Scale	1 : 20	Sheet	1 / 2	A4