

#### Warning

Do not install unit in draughts where the air movement is greater than 0.2mtr/sec.  
e.g.near entrance/exit doors, open windows, under air conditioning units or a ceiling mounted fan  
Ambient room conditions must not drop below 16°C.

NOTE:- Serving height for children up to 12 years of age.  
This model is available with a work top height of 800mm  
Trayslide height of 773mm.  
Please add "B" to the end of the product code.

#### Moffat Specification

##### Heated Display

Three heated upper shelves with a neutral bottom deck  
LED Illumination with ticket strips and rear sliding double glazed doors

##### Display Capacity

0.14 m3

##### Dimensions

Width - 830mm  
Depth - 680mm  
Height - 1655mm  
Weight - 90kg

##### Power Rating

1.05kw

##### Capacity of Cupboard [usable inside space]

Width - 695mm  
Depth - 555mm  
Usable Height Bottom shelf - 204mm  
Usable Height Top Shelf - 245mm

95 off 10" plates stacked  
or  
4 off 1/1GN pans side by side 150mm deep 2 on top 2 on bottom



##### Materials

1.2mm 304 Grade St/ Steel Top & Supports  
0.7mm 430 Grade St/ Steel Internal Structure  
GN 1/1 Grid Shelves with 30mm x 30mm tube supports

Unit Supplied with 2m cord set & 13 amp plug


##### Installation

All swivel castors, two braked

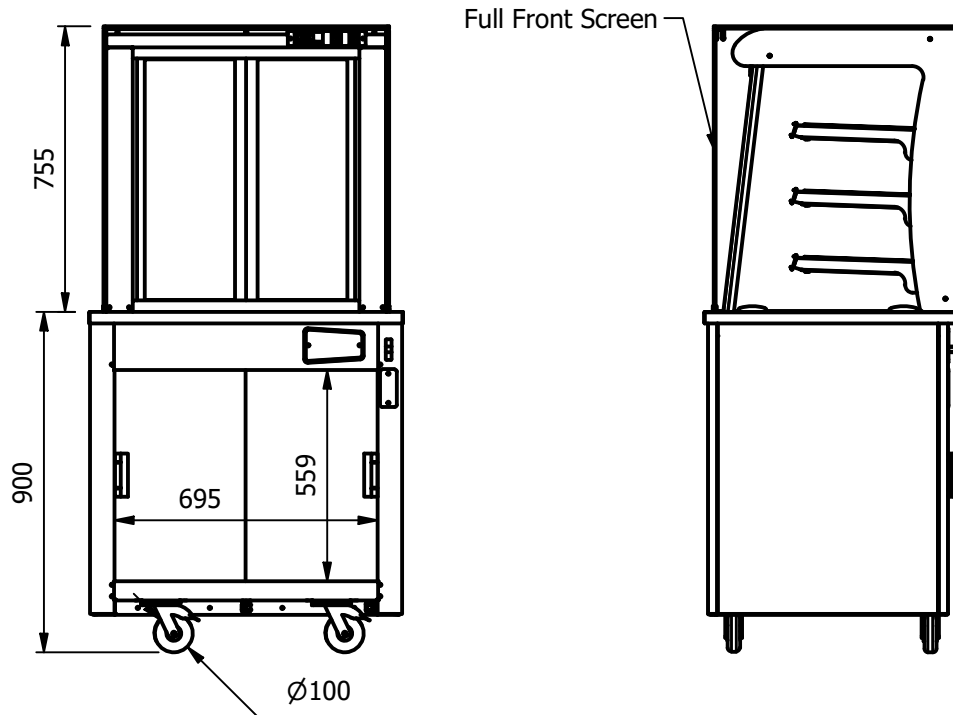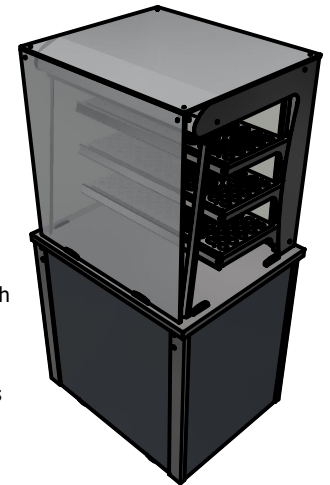

ALL SHEET METAL DIMENSIONS ARE I/S (INSIDE SIZES) (UNLESS OTHERWISE STATED)

ALL DIMENSIONS IN (mm), TOLERANCE = LINEAR  $\pm 0.5\text{mm}$ , ANGULAR  $\pm 0.5\text{mm}$  (OR AS STATED). ALL SHARP EDGES TO BE REMOVED FROM SHEET METAL PARTS

Product	VERSICARTE			Product No	N/A		
Description	*** VC2HDSLF ***						 The Catering Equipment Company
Material/Finish	Thickness			Desp/Date			
Legacy P/N	Weight	90kg		Quote No.		Dwg No.	VCP-164197
Client				SO Number	STANDARD		Issue
Client Project				Approved By		Drawn By	ABB
E & R MOFFAT LTD, SEABEGS ROAD, BONNYBRIDGE, FK4 2BS, T: +44 (0)1324 812272, E: sales@ermoffat.co.uk, Web: www.ermoffat.co.uk						Date	20/05/2025
						Scale	1 : 20
						Sheet	1 / 2
							A4

No reproduction or publication of this drawing may be made, and no article may be manufactured or assembled in accordance with this drawing without prior written consent. This prohibition is a term of any contract relating to this drawing. Rights reserved under the Copyright Act 1956 as amended by the Design Copyright Act 1968.