

Versicarte-Pro: Hot Top (Stainless Top)

Overview

Hot display with a recessed stainless-steel solid top and hot cupboard fitted with Moffat's renowned innovative sahara fan heating cell. Easily removable for cleaning and maintenance. The energy efficient solid hot top and hot cupboard work in sync, residual heat from the hot cupboard is used to compliment the hot top heating element. Hot cupboard and bainmarie are controlled by a 30° to 110° thermostat. This convection, heated hot top and hot cupboard offers a very hygienic one piece solid stainless steel top. Designed to maintain pre-heated, cooked food at a regulated temperature. Suitable for the display of most types of hot foods, The hot cupboard is designed to accommodate GN1/1 size gastronom type pans.



Key Features:

- Fast heat up and recovery time.
- Thermostatically controlled.
- Unique, removable, forced air heating cell.
- Low maintenance, easily cleaned, and highly efficient
- Very hygienic solid one piece recessed display top.
- Energy efficient residual heating design.
- 4 models in the range holding 2 to 5 GN 1/1 gastronorm type containers
- Various types of flat bottom dishes can be used.
- 24 hour operation.
- Plug and Go, complete with 2 metre long power cable and 13 amp plug.
- Fully insulated.
- Mobile all swivel castors two with brakes.

Options:

- Various heated / illuminated overhead gantry options
- Wide choice of coloured outer panels (durable plastic coated steel)
- Fold down solid tray slide or tubular tray rail



This unit features Moffat's renowned, Sahara fan heating cell.

Note:


Low height models are available set at 800mm high. Ideal for children up to 12 years. These low height models have a "B" added to the model code.

Optional solid tray slide

A A = al = I	A A sub-statistic sub-statistics
Model	Matching unit size
VC2TS	2
VC3TS	3
VC4TS	4
VC5TS	5

Optional tubular tray rail

Model	Matching unit size
VC2TR	2
VC3TR	3
VC4TR	4
VC5TR	5

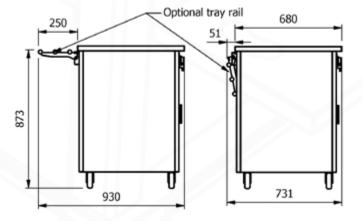





	Model	GN 1/1 Capacity	Weight (kg)	L x W x H (mm)	Hot Top (kw)	Hotcupboard (kw)	Electrical Supply	Power Rating (kw)	Rating with gantry (kw)	
	VC2HTS	2	45	830 x 680 x 900	0.75	0.9	13amp	1.65	1.87	L
Base Unit	VC3HTS	3	67	1158 x 680 x 900	1.00	0.9	13amp	1.90	2.34	
No Gantry	VC4HTS	4	90	1486 x 680 x 900	1.00	0.9	13amp	1.90	2.56	
	VC5HTS	5	112	1814 x 680 x 900	1.10	0.9	13amp	2.00	2.88	

Gantry options

Curved glass type, open or closed front with quartz heated and illuminated gantry



1.	I	Open
-		VC2
		VC3
		VC4
		VC5
r		

Open Front	Closed Front	Height above top (mm)	Number of 220w lamps	Power Rating (kw)
VC2QG	VC2QGF	405	1	0.22
VC3QG	VC3QGF	405	2	0.44
VC4QG	VC4QGF	405	3	0.66
VC5QG	VC5QGF	405	4	0.88

Square glass type, open or closed front with quartz heated and illuminated gantry





	Open Front	Closed Front	Height above top (mm)	Number of 220w Iamps	Power Rating (kw)
L	VC2QGSL	VC2QGSLF	405	1 1	0.22
	VC3QGSL	VC3QGSLF	405	2	0.44
	VC4QGSL	VC4QGSLF	405	3	0.66
	VC5QGSL	VC5QGSLF	405	4	0.88

Deli curved or square glass type, closed front with quartz heated and illuminated gantry [Note the shelf is not heated]



-	L	Ŀ	
1	1		
	2	÷.	
_			

Open Front	Closed Front	Height above top (mm)	Number of 220w Iamps	Power Rating (kw)
VC2QGD	VC2QGDSL	538	1	0.22
VC3QGD	VC3QGDSL	538	2	0.44
VC4QGD	VC4QGDSL	538	3	0.66
VC5QGD	VC5QGDSL	538	4	0.88

Island curved or square glass type, with quartz heated and illuminated gantry



Open Front	Closed Front	Height above top (mm)	Number of 220w lamps	Power Rating (kw)
VC2QGi	VC2QGiSL	405	1	0.22
VC3QGi	VC3QGiSL	405	2	0.44
VC4QGi	VC4QGiSL	405	3	0.66
VC5QGi	VC5QGiSL	405	4	0.88



E&R Moffat Ltd. Bonnybridge FK4 2BS Scotland





www.ermoffat.co.uk +44 (0) 1324 812272 sales@ermoffat.co.uk