

#### Warning

Do not install unit in draughts where the air movement is greater than 0.2mtr/sec.  
e.g. near entrance/exit doors, open windows, under air conditioning units or a ceiling mounted fan  
Ambient room conditions must not drop below 16°C.

NOTE:- Serving height for children up to 12 years of age.  
This model is available with a work top height of 800mm  
Trayslide height of 773mm.  
Please add "B" to the end of the product code.

#### Moffat Specification

**Heated Display**  
Three heated upper shelves with  
a neutral bottom deck  
LED Illumination  
with ticket strips and  
rear sliding double glazed doors

**Display Capacity**  
0.20 m3

**Dimensions**  
Width - 1158mm  
Depth - 680mm  
Height - 1650mm  
Weight - 125kg


**Power Rating**  
1.50kw

**Capacity of Cupboard [usable inside space]**  
Width - 1023mm  
Depth - 555mm  
Usable Height Bottom shelf - 204mm  
Usable Height Top Shelf - 245mm

133 off 10" plates stacked  
or  
6 off 1/1GN pans side by side 150mm deep 3 on top 3 on bottom

**Materials**  
1.2mm 304 Grade St/ Steel Top & Supports  
0.7mm 430 Grade St/ Steel Internal Structure  
GN 1/1 Grid Shelves with 30mm x 30mm tube supports

**Installation**  
All swivel castors, two braked

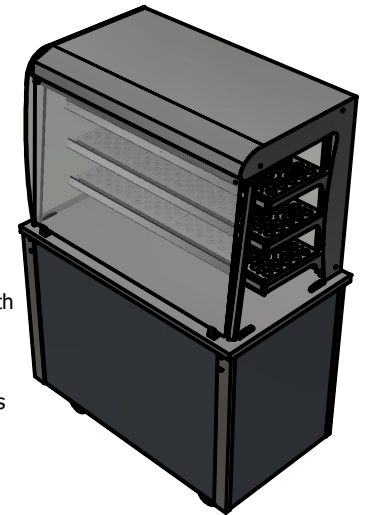

ALL SHEET METAL DIMENSIONS ARE I/S (INSIDE SIZES) (UNLESS OTHERWISE STATED)

ALL DIMENSIONS IN (mm), TOLERANCE = LINEAR  $\pm 0.5\text{mm}$ , ANGULAR  $\pm 0.5\text{mm}$  (OR AS STATED). ALL SHARP EDGES TO BE REMOVED FROM SHEET METAL PARTS

Product	VERSICARTE			Product No	N/A		<div><div><div></div><div>No reproduction or publication of this drawing may be made, and no article may be manufactured or assembled in accordance with this drawing without prior written consent. This prohibition is a term of any contract relating to this drawing. Rights reserved under the Copyright Act 1956 as amended by the Design Copyright Act 1968.</div></div><div><div>MOFFAT</div><div>The Catering Equipment Company</div></div></div>			
Description	*** VC3HDF ***									
Material/Finish		Thickness		Desp/Date						
Legacy P/N		Weight	125kg	Quote No.		Dwg No.	VCP-164194		Issue	
Client				SO Number	STANDARD	Drawn By	ABB		-	
Client Project				Approved By		Date	19/05/2025			
E & R MOFFAT LTD, SEABEGS ROAD, BONNYBRIDGE, FK4 2BS, T: +44 (0)1324 812272, E: sales@ermoffat.co.uk, Web: www.ermoffat.co.uk						Scale	1 : 20	Sheet	1 / 2	A4