MOFFAT

bellop : Hot Tops

Overview

Table Top Hot Tops designed for serving hot food and maintain cooked food temperatures. These Hot Tops have an anodised alloy surface thermostatically controlled and adjustable between 30°C and 110°C. The Hot tops can hold Gastronorm size pans up to 100mm deep when fitted with the optional adaptors. The adaptors hold the pans in position and retain heat for higher efficiency. Models fitted with an over head quartz heated gantry illuminate the serving area and provide an envelope of heat above the pans. There is also models set on an incline with guides for burgers to slide down.




Key Features:

- Stylish compact design, with or without a heated gantry with sneeze screen.
- Burger chute models set on a slope complete with convenient multi-slides.
- Thermostatic rotary control with an illuminated on/off switch
- Even temperature across the entire surface area of each panel with no hot spots.
- Designed for display where space is at a premium.
- Robust stainless steel and alloy construction. Hygienic and easy to clean.
- 4 model lengths in the range holding 1 to 4 gn 1/1 gastronorm type containers.
- Plug and Go, complete with 2 metre long power cable and 13amp plug



Options:

- Gastronorm pan adaptor (code: FTBA
- Chip dump (code: FTCS)
- Bag Holder (code: FTBH)
- Carving plate with spikes (code: FTPC)
- Gastronorm pans.

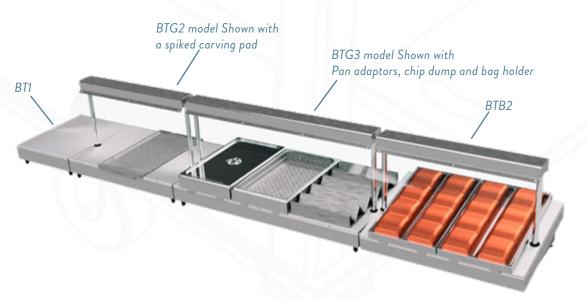













Dol	To	.
Dei	10	μ.

ber lop.						
Model	Capacity No 1/1 GN Pans	Weight (kg)	L x D x H (mm)	Electrical Supply	Power Rating (kw)	
BT1	1	4	430 x 567 x 128	13amp	0.70	
BT2	2	8	758 x 567 x 128	13amp	0.75	
BT3	3	12	1086 x 567 x 128	13amp	1.25	
BT4	4	15	1414 x 567 x 128	13amp	1.50	

Bel Top with Gantry:

Model	Capacity No 1/1 GN Pans	Weight (kg)	L x D x H (mm)	Electrical Supply	Power Rating (kw)	
BTG1	1	6	430 x 567 x 544	13amp	0.92	
BTG2	2	11	758 x 567 x 544	13amp	0.97	
BTG3	3	17	1086 x 567 x 544	13amp	1.69	
BTG4	4	22	1414 x 567 x 544	13 amp	2.16	

Bel Top Burger Chute:

Model	Capacity No 1/1 GN Pans	Weight (kg)	L x D x H (mm)	Electrical Supply	Power Rating (kw)
BTB1	J 1		430 x 581 x 544	13amp	0.40
BTB2	2	12	750 x 581 x 544	13amp	0.58
BTB3	3	18	1080 x 581 x 544	13amp	0.98
BTB4	4	23	1410 x 581 x 544	13 amp	1.38






Diagram of the BTG2 model.

-Hot Top Area






Find us on:

Y

You Tube

f





BT models



E&R Moffat Ltd. Bonnybridge FK4 2BS Scotland



581

BTB models



www.ermoffat.co.uk +44 (0) 1324 812272 sales@ermoffat.co.uk

