

## Overview

Designed specifically for the cooking / regeneration and serving of fresh, chilled or frozen bulk food. These ovens can also be used for pre-chilled plated meal regeneration. The unique multi-fan air circulation system allows fast and even heat distribution throughout. Designed for GN1/1 type pans, the CR5L has five shelf positions (two grid shelves supplied as standard). The ovens have a bright, polished, stainless steel interior, satin finished outer panels, complete with a heavy duty hinged door with positive cam action door catch. The unit is supplied with adjustable for height feet for table top sighting. These ovens can also be stacked one on top of the other and place on the optional a high stand, offering a more convenient working height and valuable storage space underneath. The CR5L13 can also be stacked on top of the larger CR10L ovens for full flexibility.



## Operating modes

- Cook & Serve - Use in the same manner as a traditional convection oven.
- Cook Chilled - Regeneration of chilled bulk food [0°C to 8°C optimum 5°C] to above 82°C.
- Cook Frozen - Regeneration of frozen bulk food [-6°C to -25°C optimum -18°C] to above 82°C.
- Keep Hot - Holding hot bulk food above 63°C, compartment controlled at 90°C

## Features

- 1/1 GN compatible. Simple to transfer to serving equipment or load from other kitchen appliances.
- Digital timer and thermostat guarantees precise time and temperature control.
- Simply rotary controls, temperature and count down timer display, with an audible buzzer indicating when food is ready.
- Twin fans deliver even heating across the entire oven chamber, ensuring no cool spots and consistent cooking results.
- Designed for bulk production, with 5 shelf capacity (shelf pitch is 71mm)
- Supplied ready assembled complete with 1 x 13A plug so no installation expense and ready to go as soon as it's delivered.
- Stackable system or tabletop design with adjustable feet
- Shelving and supports are removable for easy cleaning
- Hi-Tech insulation
- Easy grip door catch with a cam action maintaining a tight seal.
- Supplied with 2m long power cord and 13amp plug [13A 230v 50Hz].



*Two CR5L's stacked on support stand CRLHS*



## CR513 oven on mobile support stand CRLHS





Model	Weight (kg)	L x D x H (mm)	Electrical Supply	Power Rating (kw)
CR5L13	40	765 x 697 x 549	13amp	2.5

Supplied with a cable and 13 amp plug.

Oven Capacity: (usable space totals 77 litres)

Height	397 mm
Depth	347 mm
Width / length	561mm
Shelf pitch	71 mm

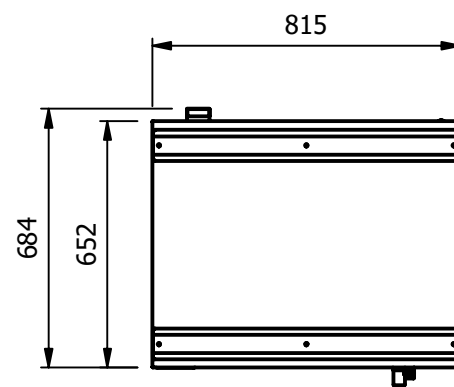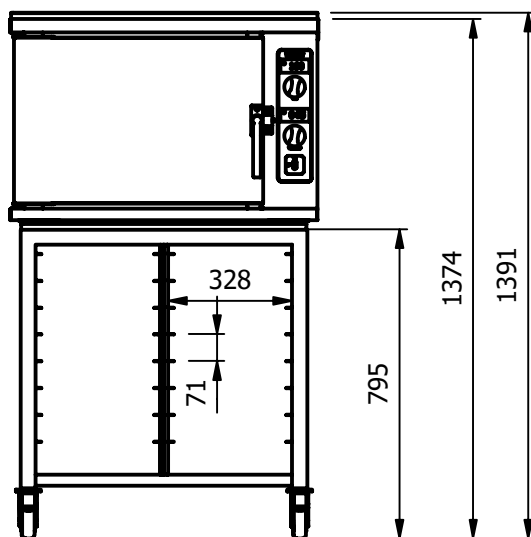

Support stand

