


<u>Important Design Parameters</u> Allowances must be made for air venting. The under slung compressor must have an unrestricted air flow. Proper venting must be provided ensuring cool air from the room can be drawn in through the condensing coil and out the other side.

## Warning

Do not install unit in draughty conditions where the air movement is greater than 0.2mtr/sec. e.g.near entrance/exit doors, open windows, under air conditioning units or a ceiling mounted fan Do not install units where there is high radiated heat, e.g. direct sunlight, room heaters, or bright spot lights. Ambient room conditions must not exceed 25°c or a relative humidity of 60%. Blocked vents will cause reduced refrigeration efficiency and lead to malfunction

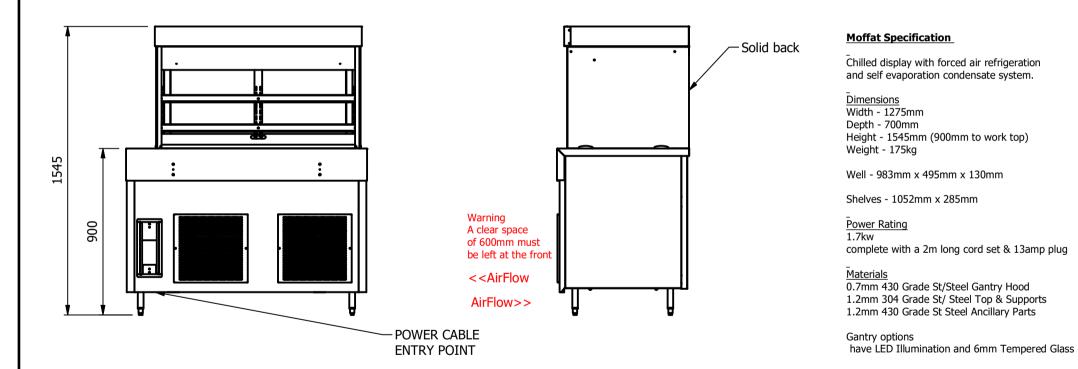

ALL SHEET METAL DIMENSIONS ARE I/S (INSIDE SIZES) (UNLESS OTHERWISE STATED)				ALL DIMENSIONS IN (mm), TOLERANCE = LINEAR ± 0.5mm, ANGULAR ± 0.5mm (OR AS STATED). ALL SHARP EDGES TO BE REMOVED FROM SHEET METAL PARTS						
Product	COUNTERS			Product No			No reproduction or publication of this drawing may be made, and no article may be manufactured			
Description	CRD3LFCSA-7						or assembled in accordance with this drawing without prior written consent. This prohibition is a term of any contract relating to this drawing. Rights reserved			/
Material/Finish		Thickness		Desp/Date		under the Copyright Act Design Cop	: 1956 as ammended by the yright Act 1968.			
Legacy P/N		Weight	175kg	Quote No.		Dwg No.	CTRP-124457-1		Issue	
Client		-		SO Number	N/A	Drawn By	AI	3B		
Client Project				Approved By		Date	28/06	/2021		_
E & R MOFFAT LTD, SEABEGS ROAD, BONNYBRIDGE, FK4 2BS, T: +44 (0)1324 812272, E: sales@ermoffat.co.uk, Web: www.ermoffat.co.uk							1:20	Sheet	1/2	A4