

Moffat Specification

Flat belt type conveyor.
 Sensor limit switch at the end of the conveyor
 Emergency-stop button at each end.
 Speed adjustable from 0 to 12 metres/minute
 Maintenance-free drum motor

Dimensions

Length - 7000mm
 Depth - 550mm
 Height - 900mm
 Weight - 90kg

Power Supply



When supplied as a motorized belt only the power requirements is 13amp 1PH.
 Optional splash proof 13amp sockets for auxiliary equipment can be fitted, each optional 13 amp socket is protected by a 13amp R.C.B.O. fitted in a splash proof M.C.B. board. Power supply requirement is made bespoke for each site and depending on how many sockets are fitted.

Materials

1.2mm 304 Grade St/ Steel Chassis Top & Supports.
 0.7mm 430 Grade St Steel Ancillary Parts.

Installation

Castors :- Swivel Type With Brakes.

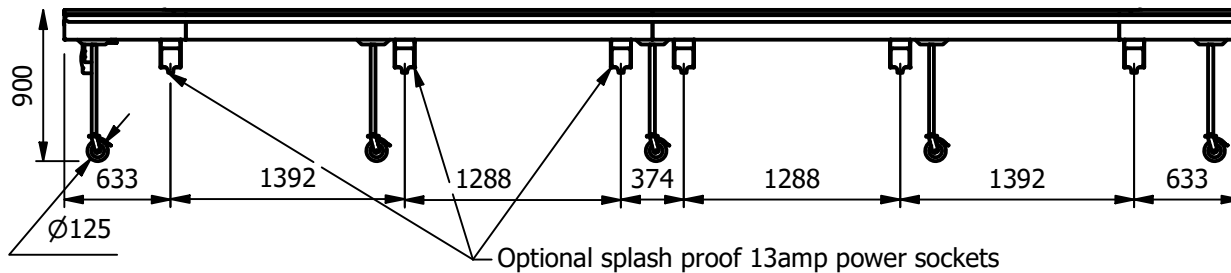

ALL SHEET METAL DIMENSIONS ARE I/S (INSIDE SIZES) (UNLESS OTHERWISE STATED)

ALL DIMENSIONS IN (mm), TOLERANCE = LINEAR ± 0.5mm, ANGULAR ± 0.5mm (OR AS STATED). ALL SHARP EDGES TO BE REMOVED FROM SHEET METAL PARTS

Product	CONVEYOR			Product No					
Description	CVB7M *** 7 METRE MOBILE BELT ***			<small>© No reproduction or publication of this drawing may be made, and no article may be manufactured or assembled in accordance with this drawing without prior written consent. This prohibition is a term of any contract relating to this drawing. Rights reserved under the Copyright Act 1956 as amended by the Design Copyright Act 1968.</small>					
Material/Finish	Thickness			Desp/Date					
Legacy P/N	Weight	90kg		Quote No.	Dwg No.	VCP-088024-1	Issue		
Client				SO Number	STANDARD		-		
Client Project				Approved By	Date	16/02/2021			
E & R MOFFAT LTD, SEABEGS ROAD, BONNYBRIDGE, FK4 2BS, T: +44 (0)1324 812272, E: sales@ermoffat.co.uk, Web: www.ermoffat.co.uk					Scale	1 : 45	Sheet	1 / 2	A4

