


Full length bumper on both sides

Photo electric sensor automatically prevents trays clashing.



Optional splash proof 13amp power sockets

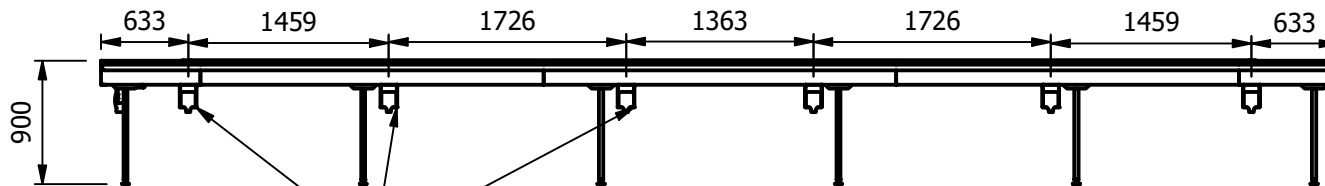

Moffat Specification

Flat belt type conveyor.
 Sensor limit switch at the end of the conveyor
 Emergency-stop button at each end.
 Speed adjustable from 0 to 12 metres/minute
 Maintenance-free drum motor

Dimensions

Length - 9000mm
 Depth - 550mm
 Height - 900mm
 Weight - 100kg

Power Supply

When supplied as a motorized belt only the power requirements is 13amp 1PH.
 Optional splash proof 13amp sockets for auxiliary equipment can be fitted, each optional 13 amp socket is protected by a 13amp R.C.B.O. fitted in a splash proof M.C.B. board.
 Power supply requirement is made bespoke for each site and depending on how many sockets are fitted.

Materials

1.2mm 304 Grade St/ Steel Chassis Top & Supports.
 0.7mm 430 Grade St Steel Ancillary Parts.

Installation

Floor fixing adjustable for height feet.

ALL SHEET METAL DIMENSIONS ARE I/S (INSIDE SIZES) (UNLESS OTHERWISE STATED)

ALL DIMENSIONS IN (mm), TOLERANCE = LINEAR ± 0.5mm, ANGULAR ± 0.5mm (OR AS STATED). ALL SHARP EDGES TO BE REMOVED FROM SHEET METAL PARTS

Product	CONVEYOR			Product No			
Description	CVB9S *** 9 METRE STATIC BELT ***						
Material/Finish	Thickness			Desp/Date			
Legacy P/N	Weight	100kg		Quote No.			
Client				SO Number	STANDARD		-
Client Project				Approved By			
E & R MOFFAT LTD, SEABEGS ROAD, BONNYBRIDGE, FK4 2BS, T: +44 (0)1324 812272, E: sales@ermoffat.co.uk, Web: www.ermoffat.co.uk				Dwg No.	VCP-088157-1		Issue
				Drawn By	N.Raymen		-
				Date	16/02/2021		
				Scale	1 : 55		Sheet
						1 / 2	A4

No reproduction or publication of this drawing may be made, and no article may be manufactured or assembled in accordance with this drawing without prior written consent. This prohibition is a term of any contract relating to this drawing. Rights reserved under the Copyright Act 1956 as amended by the Design Copyright Act 1968.

