



Full length bumper on both sides

Photo electric sensor automatically prevents trays clashing.

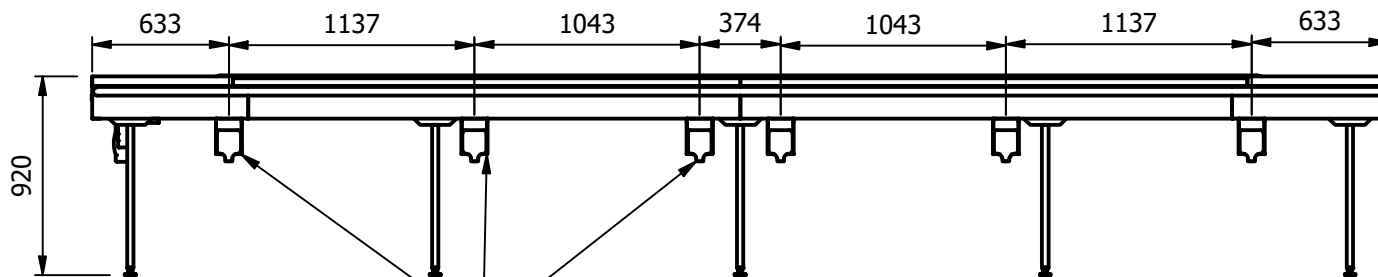

optional splash proof 13amp power sockets



**Moffat Specification**

Round cord type conveyor.  
 Sensor limit switch at the end of the conveyor  
 Emergency-stop button at each end.  
 Speed adjustable from 0 to 12 metres/minute  
 Maintenance-free drum motor

Dimensions

Length - 6000mm  
 Depth - 550mm  
 Height - 920mm  
 Weight - 85kg

Materials

1.2mm 304 Grade St/ Steel Chassis Top & Supports.  
 0.7mm 430 Grade St Steel Ancillary Parts.

Mobility

Floor fixing adjustable for height feet

ALL SHEET METAL DIMENSIONS ARE I/S (INSIDE SIZES) (UNLESS OTHERWISE STATED)

ALL DIMENSIONS IN (mm), TOLERANCE = LINEAR ± 0.5mm, ANGULAR ± 0.5mm (OR AS STATED). ALL SHARP EDGES TO BE REMOVED FROM SHEET METAL PARTS

Product	CONVEYOR			Product No				
Description	CVC6S *** 6 METRE STATIC CORD ***							
Material/Finish	Thickness				Desp/Date			
Legacy P/N	Weight	85kg			Quote No.			
Client					SO Number	STANDARD		
Client Project					Approved By			
E & R MOFFAT LTD, SEABEGS ROAD, BONNYBRIDGE, FK4 2BS, T: +44 (0)1324 812272, E: sales@ermoffat.co.uk, Web: www.ermoffat.co.uk					Dwg No.	VCP-088267-1		Issue
					Drawn By	N.Raymen		Date
					Scale	1 : 35	Sheet	1 / 2
					<b>A4</b>			

No reproduction or publication of this drawing may be made, and no article may be manufactured or assembled in accordance with this drawing without prior written consent. This prohibition is a term of any contract relating to this drawing. Rights reserved under the Copyright Act 1956 as amended by the Design Copyright Act 1968.

