



Full length bumper on both sides

Photo electric sensor automatically prevents trays clashing.

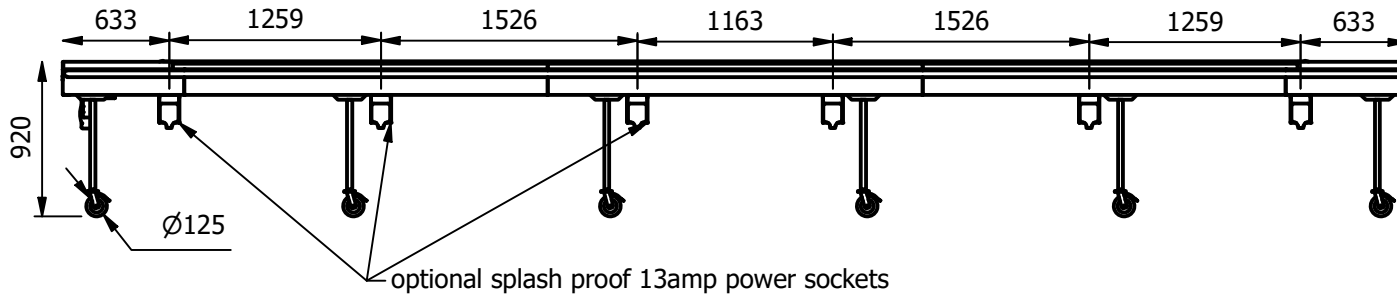

Moffat Specification

Round cord type conveyor.
Sensor limit switch at the end of the conveyor
Emergency-stop button at each end.
Speed adjustable from 0 to 12 metres/minute
Maintenance-free drum motor

Dimensions

Length - 8000mm
Depth - 550mm
Height - 920mm
Weight - 95kg

Materials

1.2mm 304 Grade St/ Steel Chassis Top & Supports.
0.7mm 430 Grade St Steel Ancillary Parts.

Mobility

Castors :- Swivel Type With Brakes.

ALL SHEET METAL DIMENSIONS ARE I/S (INSIDE SIZES) (UNLESS OTHERWISE STATED)

ALL DIMENSIONS IN (mm), TOLERANCE = LINEAR ± 0.5mm, ANGULAR ± 0.5mm (OR AS STATED). ALL SHARP EDGES TO BE REMOVED FROM SHEET METAL PARTS

Product	CONVEYOR			Product No				
Description	CVC8M *** 8 METRE MOBILE CORD ***							
Material/Finish	Thickness				Desp/Date			
Legacy P/N	Weight	95kg			Quote No.			
Client					SO Number	STANDARD		
Client Project					Approved By			
E & R MOFFAT LTD, SEABEGS ROAD, BONNYBRIDGE, FK4 2BS, T: +44 (0)1324 812272, E: sales@ermoffat.co.uk, Web: www.ermoffat.co.uk					Dwg No.	VCP-088305-1		Issue
					Drawn By	N.Raymen		-
					Date	16/02/2021		
					Scale	1 : 45		Sheet 1 / 2 A4

No reproduction or publication of this drawing may be made, and no article may be manufactured or assembled in accordance with this drawing without prior written consent. This prohibition is a term of any contract relating to this drawing. Rights reserved under the Copyright Act 1956 as amended by the Design Copyright Act 1968.

