

Overview

Specially designed food standard continuous belt conveyor system electrically powered and constructed with a splash proof satin finish stainless steel superstructure. Supported on robust tubular legs with adjustable for levelling off floor fixing feet or with the optional swivel/braked castors if mobility is required. Fitted with a full-length heavy-duty bumper on both sides for protection when used with ancillary equipment. Designed to be used as a part of a specific hospital grade food service system where reliability, ease of operation, and hygiene standards are of the utmost importance. The 300mm wide seamless 'White' synthetic anti-static flat belt, can be used to smoothly transport individual items of crockery or as an integral part of a tray line operation.




Mobile option

Key Features:

- The silent smooth running anti-static conveyor units have a simplistic control panel at one end featuring a start and stop button, variable speed control, with the option of forward and reverse motion.
- Emergency stop switches are located at each end of the unit. There is also a fundamental photo electric sensor fitted at the receiving end of the unit which automatically prevents trays clashing and breakages.
- At each end of the conveyor belt there is 571mm long work area. This is essential at the start of the operation for tray set up, and placement of index cards. This area is of equal importance at the receiving end to aid trolley loading and transporting systems.
- As safety and hygiene are paramount when operating a food conveyor system these units are open on the underside to ensure there is no build-up of debris or spillage. Rubber cleaning scrapers and finger guards are fitted, automatically cleaning and maintaining belt safety.
- Any size of Conveyor up to 6m long can be transported in one piece, over 6m long Conveyor units must be split for transport and Installation.
- The easily accessible splash proof distribution switch board and mains isolator are located at the end of the unit below the main control panel.

Options:

- Splash proof 13amp power sockets with distribution switch board.

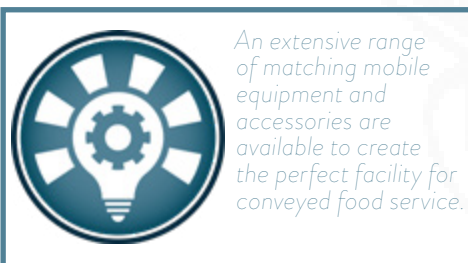

An extensive range of matching mobile equipment and accessories are available to create the perfect facility for conveyed food service.



