

Important Design Parameters


On the operators side of the Servery Counter a removable service panel is required to allow access to service heating elements etc.

The dimensions of the access aperture must be no less than 997mm x 145mm.

Additionally access is required to manually operate the drain valve. Drain connection is via 15mm lever ball valve.

Warning

The unit must be maually filled with water. Capacity 20 litre A depth of 40mm must be maintained during opration. [water level marker fitted to element cover]

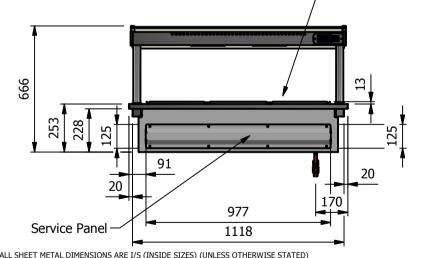

660 Solve 12 133 636 Drain connection

Moffat Specification

Wet Heat

Immersion heated Bainmarie Well

Dimensions

Width - 1158mm Depth - 660mm Height - 666mm Weight - 44kg

Power Rating

3.44kw

complete with a 2m long cord set & 16amp plug

Materials

1.2mm 304 Grade St/ Steel Top, Supports & Well 0.7mm 430 Grade St/ Steel External Structure 0.7mm Galvanised Steel Undercarrage 6mm Tempered Glass Ouartz Lamps

<u>Installation</u>

Counter Top Flush Fit Cut Out Dimensions 1164mm x 666mm x 25mm Counter Support Cut Out Dimensions 1140mm x 642mm

ILESS OTHERWISE STATED) A	ALL DIMENSIONS IN (mm), TOLERANCE = LINEAR \pm 0.5mm, ANGULAR \pm 0.5	.5mm (OR AS STATED). ALL SHARP EDGES TO BE REMOVED FROM SHEET METAL PARTS

Product	DROP-IN	RANGE		Product No		No reproduction or publication or may be made, and no article may be		MOFFAT			
Description	D3B				or assembled in accordance with this drawing without prior written consent. This prohibition is a ter of any contract relating to this drawing. Rights reserv				_		
Material/Finish		Thickness		Desp/Date			t 1956 as ammended by the syright Act 1968.	Company		L	
Legacy P/N		Weight	44kg	Quote No.		Dwg No.	DIP-0	DIP-022412		Issue	
Client		-		SO Number	N/A	Drawn By	AE	3B			
Client Project	nt Project Approved By					Date	16/01	/2019			
E & R MOFFAT LTD, SEABEGS ROAD, BONNYBRIDGE, FK4 2BS, T: +44 (0)1324 812272, E: sales@ermoffat.co.uk, Web: www.ermoffat.co.uk						Scale	1:20	Sheet	1/2	A4	