



# Dishwash tables,



## Operating & Service Manual

## Fabrication, Sinks, Tables, & Ambient units



**Do not use scouring pads or abrasive cleaners of any type.**

**Do not use Solvents, bleach, Caustic Cleaners or biological powders**

### General fabrication and neutral units.

Cleaned with hot soapy water and thereafter dried & polished with a soft dry cloth or leather chamois.

### Shelving and understructure

should be similarly cleaned, always ensuring that the stainless steel is wiped in straight strokes following the grain of the material.

### Cupboards

The top should be wiped as described above and the interior cleaned with a damp cloth, then dried & polished. If sliding doors are fitted within the unit these can easily be removed for cleaning as described in the instruction manual supplied with the unit.

Any drain holes must also be kept clear from blockage.

Glass panels and sneeze screens should be cleaned with a damp, clean cloth and finish off by carefully drying with a soft dry cloth or kitchen towel.

### **DO NOT**


- Leave wet cloths on the surface
- Do not use strong bleach, or material containing sodium hypochlorite or chlorine.
- Do not soak cloths or materials in bleaching fluids within sink bowl over a period of several hours.
- Do not use concentrated disinfectants within sink bowl. Always dilute and carry out full cleaning instructions.
- Do not use wire wool or abrasive cleaning Materials.
- Do not use acids for cleaning the floor around the unit.

### **DO**

- Wash down regularly with hot soapy water.
- Soap powders (non-abrasive) or cleaning powders may also be used to help remove stubborn deposits
- Rinse surface thoroughly with clean hot or cold water. dry with soft cloth.
- Clean undershelf & legs in the same manner, ensuring that they are properly rinsed with clean water & dried
- When cleaning stainless steel, always wipe in straight strokes following the grain of the Material.

## FITTING INSTRUCTIONS

### QUICK SEAL MECHANICAL JOIN

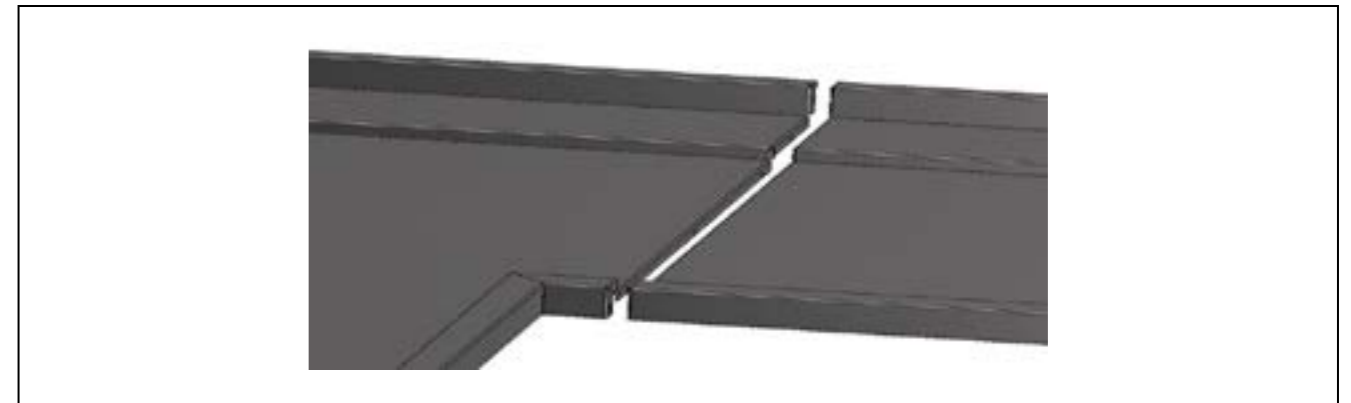


### INSTALLATION

- Remove all packaging & plastic coatings from the worktops.
- Check designated area for floor level irregularities and plan best height & position
- Layout units to be joined and level off using adjustable feet
- Leave a 5mm gap between the faces and insert fixing screws
- Surfaces to be joined must be completely dry and free of dust
- Use a food safe silver type silicone sealant to bond the join
- Carefully apply a bead of silicone into and along the gap
- Immediately tighten up the fixing screws
- Wipe off excess Silicone sealant leaving a neat concave seal

### “Top Tip”

before wiping off excess, spray the seal with soapy water then use an application tool or an old credit card to cut-in and wipe clean, creating a neat watertight join.

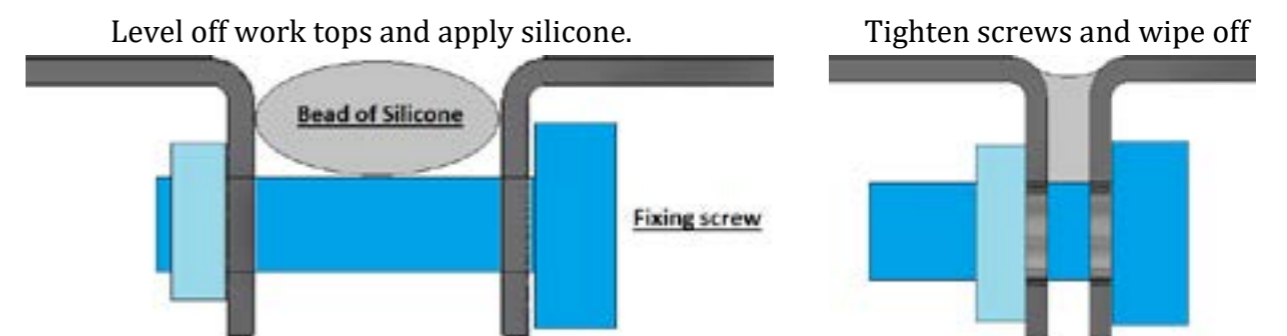

# Thank you for choosing E&R Moffat!

*Scan the QR code below to visit the  
E&R Moffat website for further information:*



**Failure to use the correct cleaning  
procedure will invalidate the  
warranty of your product.**

