


Allowances must be made for air venting.  
The under slung compressor must have an unrestricted air flow.  
Vents must not be blocked, cool air from the room is drawn in through the front condensing coil and out the rear

Do not install unit in draughty conditions where the air movement is greater than 0.2mtr/sec.  
e.g.near entrance/exit doors, open windows, under air conditioning units or a ceiling mounted fan  
Do not install units where there is high radiated heat, e.g. direct sunlight, room heaters, or bright spot lights.  
Ambient room conditions must not exceed 25°C or a relative humidity of 60%.  
Blocked vents will cause reduced refrigeration efficiency and lead to malfunction

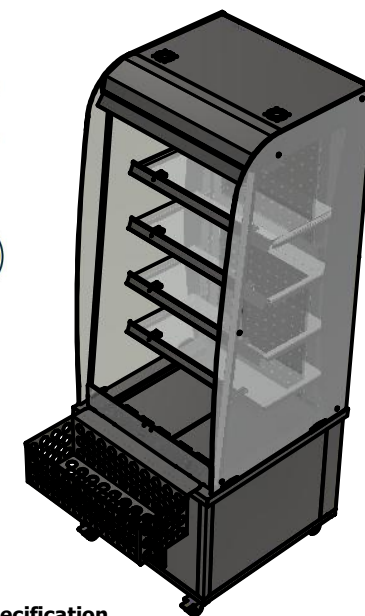

Mobile with all swivel castors two braked

Product	MERCHANDISER			Product No	N/A	 No reproduction or publication of this drawing may be made, and no article may be manufactured or assembled in accordance with this drawing without prior written consent. This prohibition is a term of any contract relating to this drawing. Rights reserved under the Copyright Act 1956 as amended by the Design Copyright Act 1968. The Catering Equipment Company				
Description	MC1D									
Material/Finish		Thickness		Desp/Date						
Legacy P/N		Weight	146kg	Quote No.		Dwg No.	GGP-049583		Issue	
Client				SO Number	N/A	Drawn By	ABB		-	
Client Project				Approved By		Date	19/07/2019			
E & R MOFFAT LTD, SEABEGS ROAD, BONNYBRIDGE, FK4 2BS, T: +44 (0)1324 812272, E: sales@ermoffat.co.uk, Web: www.ermoffat.co.uk						Scale	1 : 20	Sheet	1 / 2	<b>A4</b>