
Important Design Parameters

Allowances must be made for air venting. The under slung compressor must have an unrestricted air flow. Proper venting must be provided ensuring cool air from the room can be drawn in through the condensing coil and out the other side.

Warning

Do not install unit in draughty conditions where the air movement is greater than 0.2mtr/sec. e.g.near entrance/exit doors, open windows, under air conditioning units or a ceiling mounted fan Do not install units where there is high radiated heat, e.g. direct sunlight, room heaters, or bright spot lights. Ambient room conditions must not exceed 25°c or a relative humidity of 60%. Blocked vents will cause reduced refrigeration efficiency and lead to malfunction

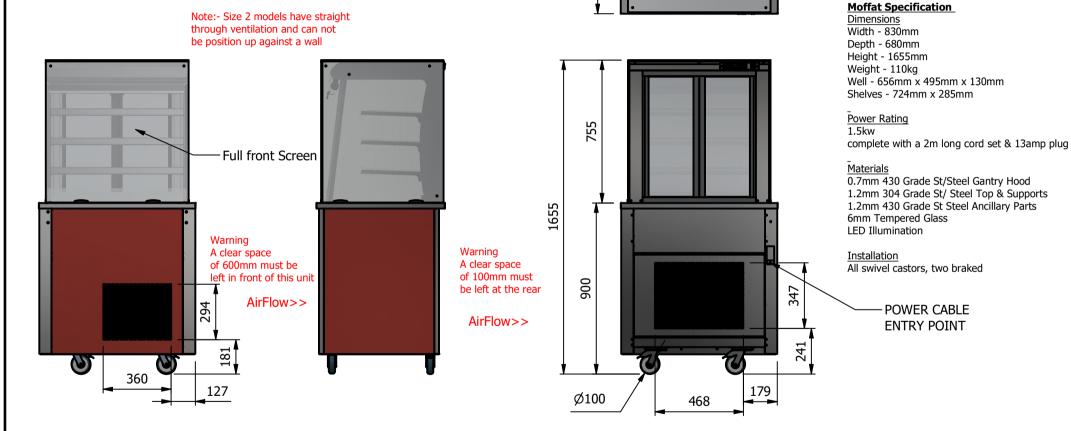

680

830

NOTE: - Serving height for children up to 12 years of age.

This model is available with a work top height of 800mm

Please add "**B**" to the end of the product code.

and a Travslide height of 773mm.

ALL SHEET METAL DIMENSIONS ARE I/S (INSIDE SIZES) (UNLESS OTHERWISE STATED)				ALL DIMENSIONS IN (mm), TOLERANCE = LINEAR ± 0.5mm, ANGULAR ± 0.5mm (OR AS STATED). ALL SHARP EDGES TO BE REMOVED FROM SHEET METAL PARTS						
Product	VERSICARTE			Product No			No reproduction or publication of this drawing may be made, and no article may be manufactured		MOFFAT	
Description	*** VC2RDSLF ***					or assembled in accordance with this drawing without prior written consent. This prohibition is a term of any contract relating to this drawing. Rights reserved The Catering Equip				
Material/Finish		Thickness		Desp/Date		under the Copyright Ac	t 1956 as ammended by the byright Act 1968.	c c	Company	
Legacy P/N		Weight	219.18Kg	Quote No.		Dwg No.	VCP-062705		Iss	sue
Client				SO Number	STANDARD	Drawn By	A	BB	<u> </u>	
Client Project				Approved By		Date	05/07/2023		1	-
E & R MOFFAT LTD, SEABEGS ROAD, BONNYBRIDGE, FK4 2BS, T: +44 (0)1324 812272, E: sales@ermoffat.co.uk, Web: www.ermoffat.co.uk						Scale	1:20	Sheet	2/2	A4