


MOFFAT Kitchen pass / Overshelving



Operating & Service Manual



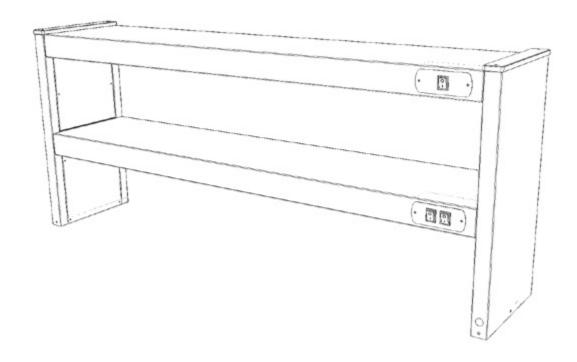

To ensure the best results from this unit please take the time to read and follow all safety, installation and maintenance guidelines carefully before proceeding to install. Keep this manual in a safe place for future consultation.



UK These appliances are marked in compliance with the relevant Low CA Voltage & EMC Directives. Voltage stated on unit data plate.



Warning! Please pay attention to sections of the manual displaying this symbol.



Warning! Do not attempt to use a hose or water jet to clean this unit. For cleaning instructions, refer to section 15.

The appliance must only be used for the purpose it was designed for and may become unsafe if used for any other purpose. Operators should be trained. The room where this trolley is used must be dry, clean with temperatures between 16°C and 25°C and with a maximum relative humidity of 60%. This unit is for indoor use only and has an IPX4 rating.

"If the supply cord is damaged, it must be replaced by the manufacturer, service agent or suitably qualified person"

Appliance must be disconnected from the power supply during cleaning, maintenance and part-replacement".



Content	S	page
1	Electrical Specification	3
2	General Installation	4
3	Operation heated models	5
4	Fixing points	6/7
5	Changing Lights	8
6	Cleaning	9

1: Electrical Specification



This appliance must be earthed and damaged cables must be replaced by a suitably qualified person!

	1 Phase Cable	3 Phase Cable		
Live (L1)	Brown	Brown		
L2	X	Black		
L3	X	Grey		
Neutral	Blue	Blue		
Earth	Yellow & Green (Striped)	Yellow & Green (Striped)		





2: General Installation

Before installation please read the following points:

- · When placing the counter bodies in position ensure there is adequate access.
- These mobile units can simply be butted up together to form a food service counter.
- · Roll into position and apply the brakes on the operator's side.
- · Before installing, it is recommended that the floor is swept clean.




This equipment is designed to be operated by suitably qualified persons. It is the responsibility of the Supervisor or equivalent to instruct users, provide suitable P.P.E., show the mains isolating switch location, and inform users that parts may become hot, causing injury if touched.

- 1. Remove all packaging & plastic coatings from the appliance.
- 2. Check for any damage.
- 3. Assemble all parts, including shelves, food containers etc.
- 4. Hot cupboards: Ensure that the heater in the base is located correctly and plugged in.
- 5. Heated units: Fit the supplied halogen bulbs to the holders under the gantry.
- 6. Ensure all switches and thermostat controls are in the OFF position
- 7. Connect the mains input plug to the socket outlet.
- 8. Turn on and check the unit is functioning correctly.




3: Operation (Quartz lamp heated units)

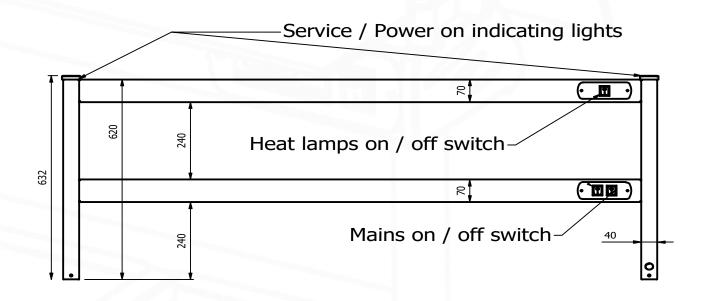


Heated models to suit Premier Hot cupboards and Bainmaries.

	Model	Model Size	L x W x H (mm)	Number of 220w lamps	Electrical Supply	Power Rating (kw)
One Tier	KP2H1	2	876 x 311 x 322	2	13amp	0.44
	KP3H1	3	1196 x 311 x 322	3	13amp	0.66
	KP4H1	4	1492 x 311 x 322	4	13amp	0.88
	KP5H1	5	1796 x 311 x 322	5	13amp	1.10
	KP6H1	6	2146 x 311 x 322	6	13amp	1.32
Two Tier	KP2H2	2	876 x 311 x 632	4	13amp	0.88
	KP3H2	3	1196 x 311 x 632	6	13amp	1.32
	KP4H2	4	1496 x 311 x 632	8	13amp	1.76
	KP5H2	5	1796 x 311 x 632	10	13amp	2.20
	KP6H2	6	2146 x 311 x 632	12	13amp	2.64
Three Tier	KP2H3	2	876 x 311 x 942	6	13amp	1.32
	KP3H3	3	1196 x 311 x 942	9	13amp	1.98
	KP4H3	4	1496 x 311 x 942	12	13amp	2.64
	KP5H3	5	1796 x 311 x 942	15	16amp	3.30
	KP6H3	6	2146 x 311 x 942	18	63amp	3.96

4: Fixing points

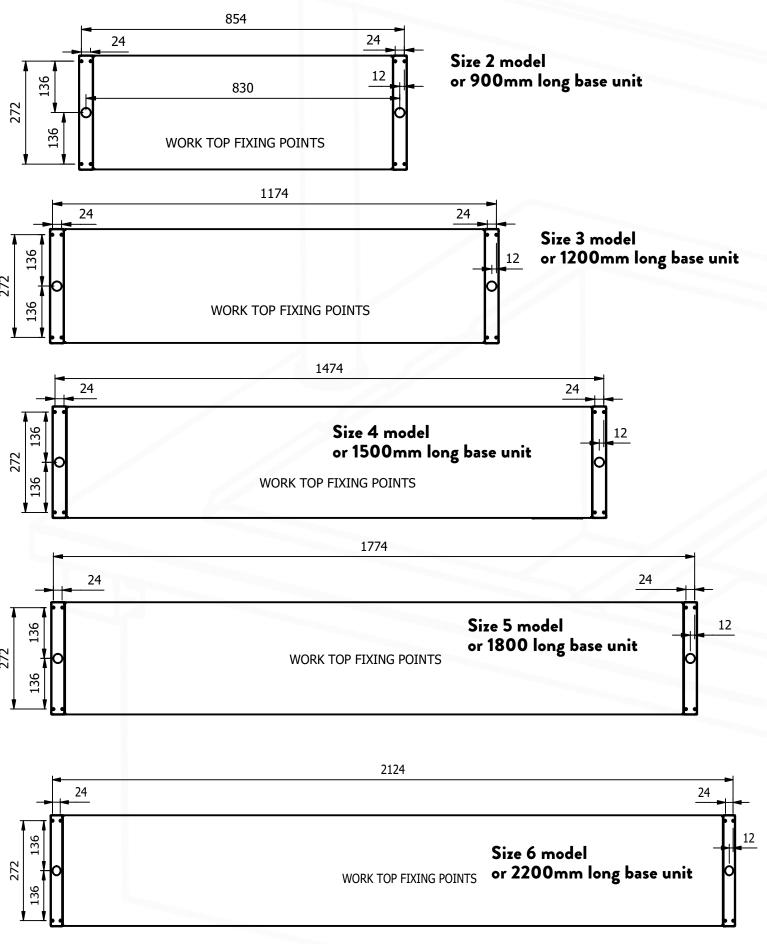

4: Fixing points

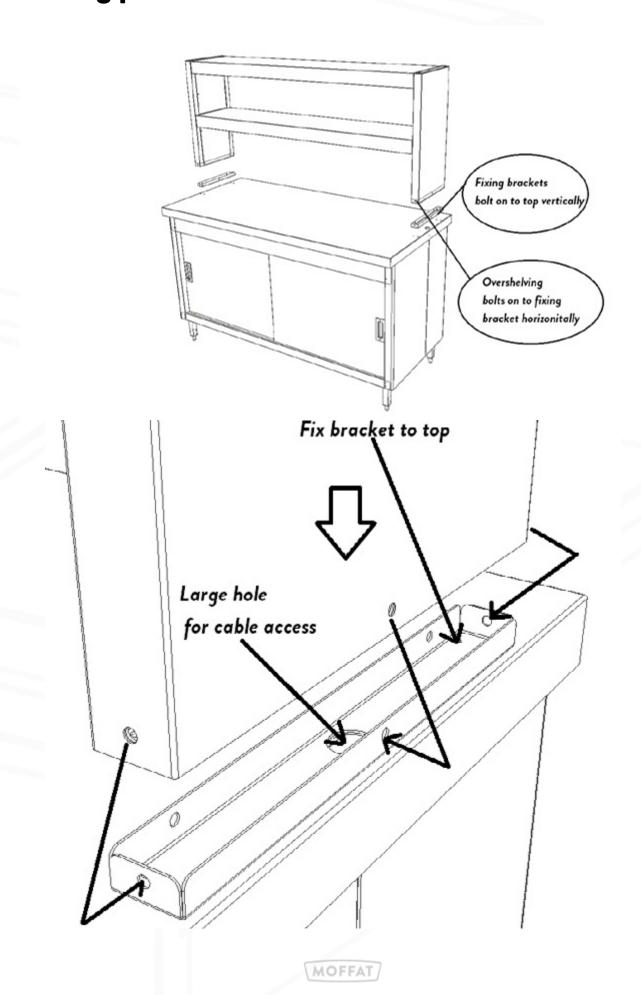

5: Quartz Lamp Replacement

Ensure appliance is disconnected from mains before servicing.




Lamps should not be touched with bare hands, as this may cause premature failure. If lamp is touched, wipe clean with a cloth and alcohol prior to use.

Replacement quartz lamps must never exceed the loading specified.

Wear safety glasses. Don't touch hot halogen bulbs.

Only use replacement bulbs that match the wattage and design of the fixture.

- 1. Isolate appliance from power supply and allow cooling down before commencing lamp replacement.
- 2. Carefully slide mesh guard to one side until it clears the bulb area.
- 3. Remove faulty lamp by pushing to one side then pull down. Hold the insulated end of the new lamp (Any end).
- 4. At a slight angle, slot the end of the new lamp into one of the Housing
- 5. Push against the sprung contact & hold it there.
- 6. Raise the opposite end of the lamp into the other end of the Lamp.

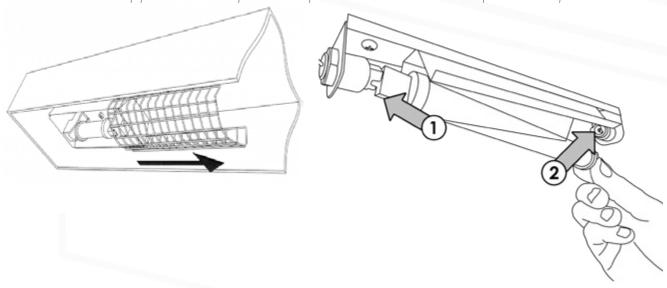



6: Cleaning



Before attempting to clean the unit, please ensure that the Unit is isolated from the electric supply and allowed to cool down, with all food plates and other Dishes removed from the unit.

Do not use a water jet or pressure spray to clean this appliance.

- 1. Disconnect from mains and wait until appliance has cooled.
- 2. Wipe clean using hot, soapy water and soft, non-abrasive cloth. Ensure that the stainless steel is wiped in straight strokes following the grain of the material.
- 3. Wipe dry using a clean cloth. Do not use scouring pads or abrasive cleaners of any type. Shelving and select inner panels can be removed to allow a deeper internal clean. Ensure all panels and fixings are replaced after cleaning operation.
- 4. Finish by carefully drying with a soft dry cloth or Kitchen Towels.



Do not use scouring pads or abrasive cleaners of any type.

Do not use Solvents, bleach, Caustic Cleaners or biological powders on any surface.



Special care should be taken around electrical parts, avoided excessive use of water.

Take special care when cleaning glass use a soft duster & glass cleaner spray.



Thank you for choosing E&R Moffat!

Scan the QR code below to visit the E&R Moffat website for further information:

