

Moffat Specification

Flat belt type conveyor.
 Sensor limit switch at the end of the conveyor
 Emergency-stop button at each end.
 Speed adjustable from 0 to 12 metres/minute
 Maintenance-free drum motor

Dimensions

Length - 9000mm
 Depth - 550mm
 Height - 900mm
 Weight - 100kg

Power Supply


When supplied as a motorized belt only the power requirements is 13amp 1PH.
 Optional splash proof 13amp sockets for auxiliary equipment can be fitted, each optional 13 amp socket is protected by a 13amp R.C.B.O. fitted in a splash proof M.C.B. board.
 Power supply requirement is made bespoke for each site and depending on how many sockets are fitted.

Materials

1.2mm 304 Grade St/ Steel Chassis Top & Supports.
 0.7mm 430 Grade St Steel Ancillary Parts.

Installation

Castors :- Swivel Type With Brakes.

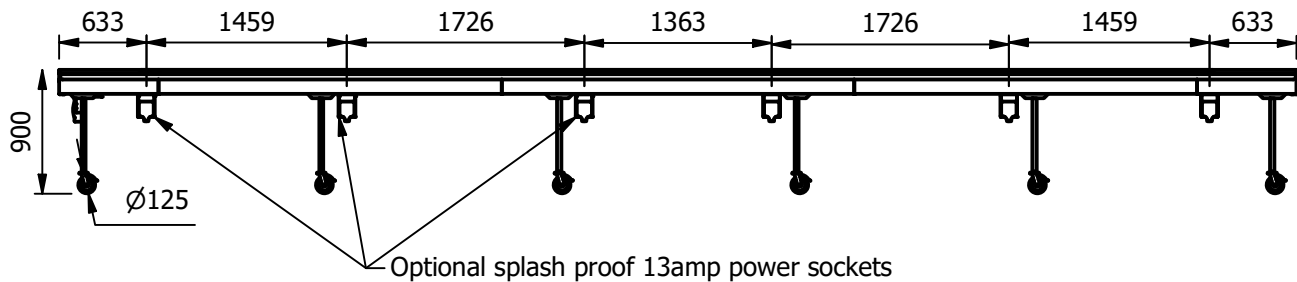

ALL SHEET METAL DIMENSIONS ARE I/S (INSIDE SIZES) (UNLESS OTHERWISE STATED)

ALL DIMENSIONS IN (mm), TOLERANCE = LINEAR ± 0.5mm, ANGULAR ± 0.5mm (OR AS STATED). ALL SHARP EDGES TO BE REMOVED FROM SHEET METAL PARTS

Product	CONVEYOR			Product No			
Description	CVB9M *** 9 METRE MOBILE BELT ***						
Material/Finish	Thickness			Desp/Date			
Legacy P/N	Weight	100kg		Quote No.			
Client				SO Number	STANDARD		-
Client Project				Approved By			
E & R MOFFAT LTD, SEABEGS ROAD, BONNYBRIDGE, FK4 2BS, T: +44 (0)1324 812272, E: sales@ermoffat.co.uk, Web: www.ermoffat.co.uk				Dwg No.	VCP-088156-1	Issue	
				Drawn By	N.Raymen		-
				Date	16/02/2021		
				Scale	1 : 55	Sheet	1 / 2 A4

No reproduction or publication of this drawing may be made, and no article may be manufactured or assembled in accordance with this drawing without prior written consent. This prohibition is a term of any contract relating to this drawing. Rights reserved under the Copyright Act 1956 as amended by the Design Copyright Act 1968.

